


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 34 TOWNSHIP 17 RANGE 4  
DATE: 2-5-2000  
PARTY CHIEF: Wilcoxon  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison  
METHOD OF ESTABLISHMENT: County: 7-26-88

IN. S.P.C. E ZONE, NAD 83

NAME: 17043401

N: 514646.3530(m)

E: 65523.9550(m)

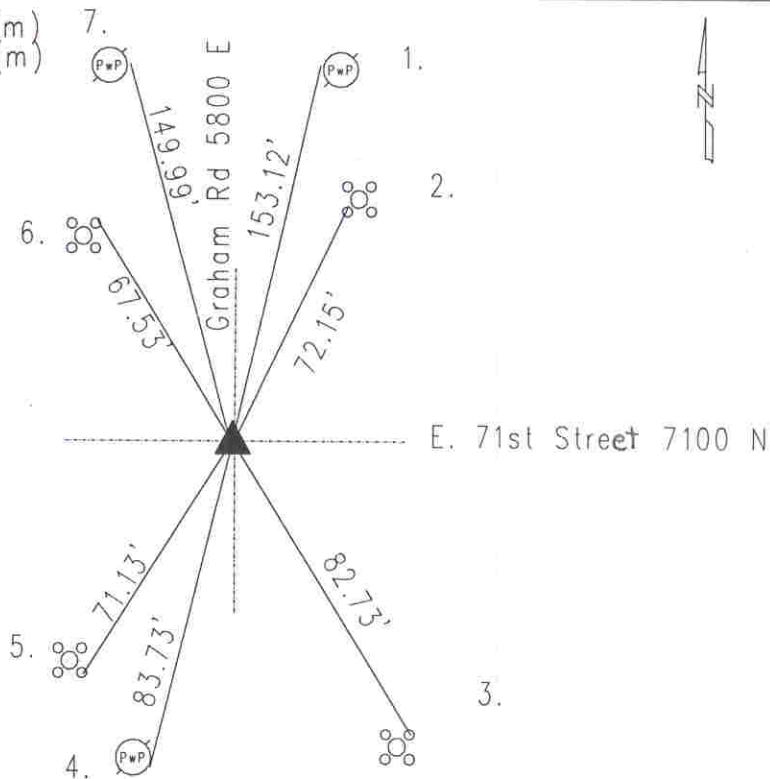

Original post set 1821 by Wm. B. Laughlin with witnesses: 14" beech N 6 W 14 links, 10" sugar maple S 24 E 4 links per Marion County Atlas pg. 12. John J. Griffith 4-9-23 called for stone found, SW corner of Sec. 27-17-4 per Lawrence Township Legal Survey Book pg. 56. Corner 1-17-55 called stone set. 12-10-70 called for iron pin 8" down. 3-24-76 called for railroad spike. Excavated 7-26-88 and railroad spike found 4" down, rebar found 12" down, and .20 E of railroad spike, Harrison set per construction ties to railroad spike. Re-tied 2-5-2000 by Wilcoxon.

HC743401

REF.	DISTANCE	DESCRIPTION
1.	153.12'	Mag nail w/brass washer W guide pole #466-275
2.	72.15'	Cut 'x' SW-bolt of aluminum pole base
3.	82.73'	Cut 'x' NE-bolt of aluminum pole base
4.	83.73'	PK nail E PwP#14-275 15"up
5.	71.13'	Cut 'x' SE-bolt of aluminum pole base
6.	67.53'	Cut 'x' NE-bolt of aluminum pole base
7.	149.99'	PK nail w/brass washer W PwP#152-275 12"up